


## General information

### MiniFlex Flexible pipe PP 60 L=15M

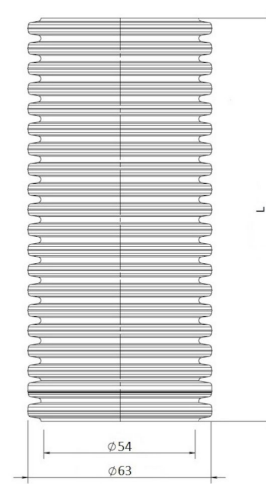

## Specifications

Article number	400755801
Material flue duct	Plastic
Quality class flue duct	PP
Wall thickness flue duct nom (mm)	0,4
Material seal flue duct	EPDM (not included)
Colour	Gray
Weight (kg)	4,65

## Dimensions

Diameter flue duct nom (mm)	60
Outer dimensions (l x w x h mm)	910 x 400 x 910

## Application Insights

Intended use	Discharge of flue gases
Location class	Inside an existing flue gas shaft

## Technical Specifications

---

Declaration of performance	001-MG-PP DoP
Harmonized standard	EN 14471: 2013 + A1: 2015
System according to DoP	0,4
CE Marking	T120 H1 W2 O30 LI E U
ζF Flue duct	1,7
Thermal resistance flue duct (m <sup>2</sup> K/W)	0
Roughness value flue duct (m)	0,0029
Equivalent length (m)	2,8
Other specifications	The mentioned ζF and equivalent length are per meter.


## Mounting and installation

---

Always install according to the national regulations. For safe installation, consult the installation and associated mounting instructions, see [Burgerhout.com](http://Burgerhout.com).

## Graph

Pressure loss per meter versus flow rate

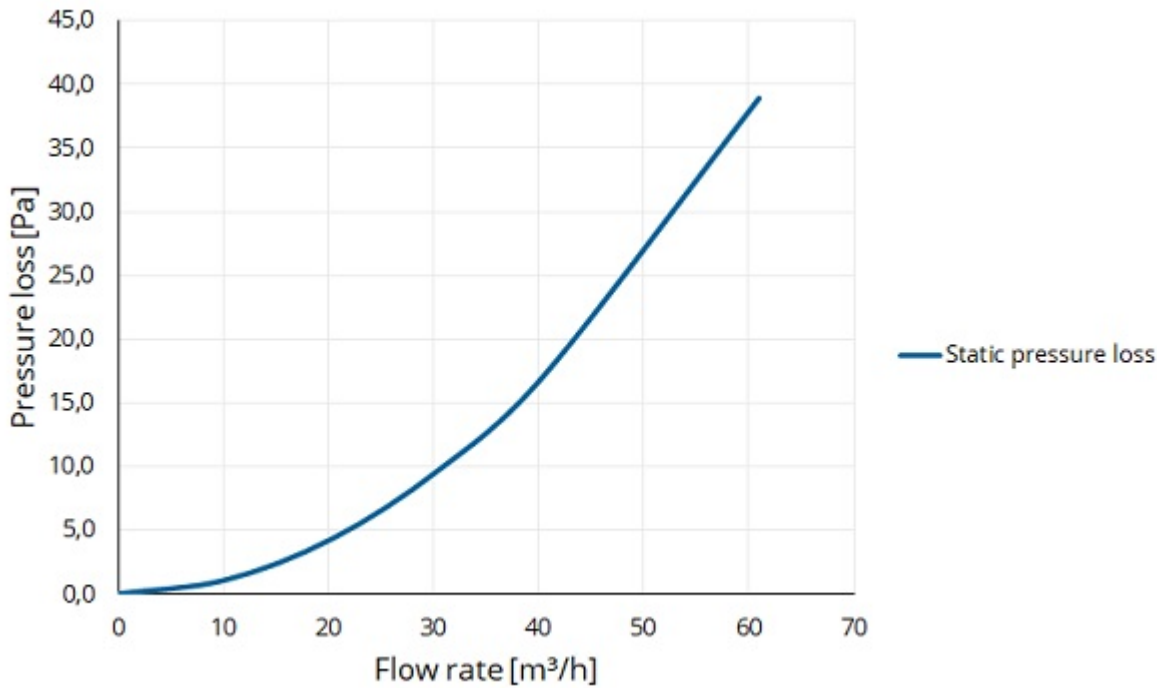

## Table

Flow rate versus pressure loss per meter

Flow rate			Static pressure loss [Pa]
[m/s]	[m³/h]	[l/s]	
0	0	0	0,0
1	10	3	1,1
2	20	6	4,3
3	31	8	9,7
4	41	11	17,3
6	61	17	38,9