


## General information

### TwinSafe+ Reducer AL Concentric 80/125 to 60/100

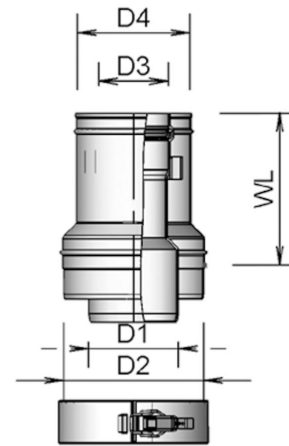

## Specifications

Article number	400456227
Material flue duct	Aluminium
Quality class flue duct	EN 573-3: 2019; EN AW-Al MgSi
Wall thickness flue duct nom (mm)	1,5
Material seal flue duct	Silicone Blue
Material air duct	Galvanized steel (coated)
Quality class air duct	EN10346: DX52D
Wall Thickness (mm)	0,4
Material seal air duct	EPDM
Colour air duct	White (RAL 9016)
Weight (kg)	0,42

## Dimensions

Diameter flue duct nom (mm)	80 - 60
Diameter air duct nom (mm)	125 - 100
Outer dimensions (l x w x h mm)	185 x 135 x 110

## Application Insights

Intended use	Exhaust of flue gases and supply of combustion air
Location class	For outdoor and indoor installation

## Technical Specifications

---

Declaration of performance	001-MG-ALU DoP
Harmonized standard	EN 1856-1: 2009
System according to DoP	0,4
CE Marking	T200 P1 W V1 L10/11/13 150 O00
ζF Flue duct	0,3
ζA Air duct	0,4
Thermal resistance flue duct (m <sup>2</sup> K/W)	0
Thermal resistance air duct (m <sup>2</sup> K /W)	0
Roughness value flue duct (m)	0,001
Roughness value air duct (m)	-
Equivalent length (m)	0,79
Other specifications	-


## Mounting and installation

---

Always install according to the national regulations. For safe installation, consult the installation and associated mounting instructions, see [Burgerhout.com](http://Burgerhout.com).

## Graph

Pressure loss versus flow rate

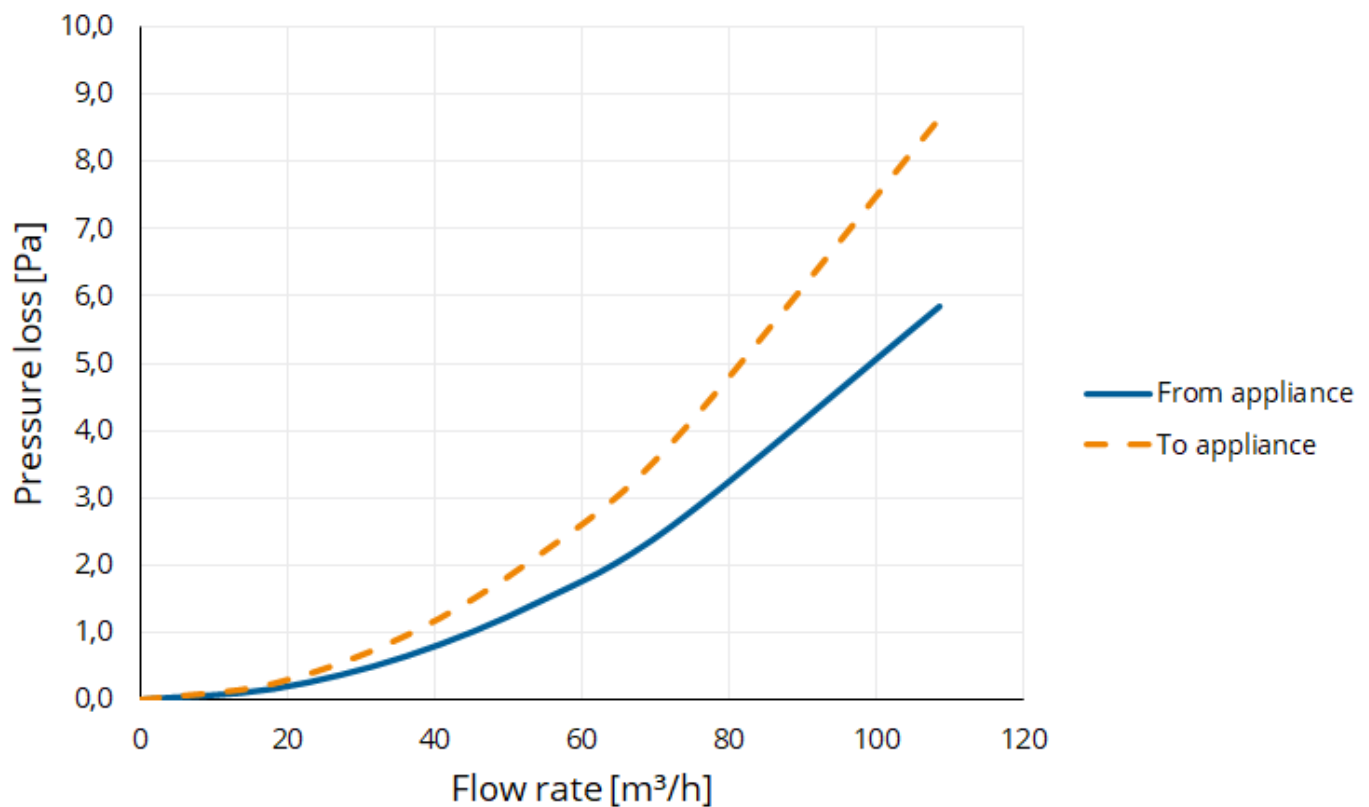

## Table

Flow rate versus pressure loss

Flow rate			Static pressure loss	
[m/s]	[m³/h]	[l/s]	From appliance [Pa]	To appliance [Pa]
0	0	0	0,0	0,0
1	18	5	0,2	0,2
2	36	10	0,6	1,0
3	54	15	1,5	2,2
4	72	20	2,6	3,8
6	109	30	5,8	8,6