


General information

Roof terminal M2000 AL 80/125 with adapter 80-80 Black

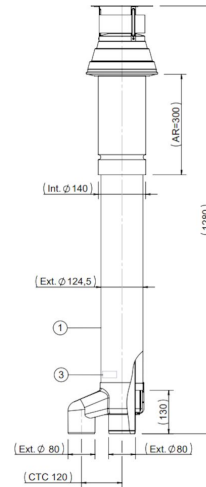

Specifications

Article number	410029063
Colour external part	Black (RAL 9005)
Material flue duct	Aluminium
Quality class flue duct	EN 573-3: 2019; EN AW-Al MgSi
Wall thickness flue duct nom (mm)	1,5
Material air duct	Galvanized steel
Quality class air duct	EN10346: DX52D
Wall Thickness (mm)	0,4
Colour air duct	Material's own color
Weight (kg)	3,81

Dimensions

Diameter flue duct nom (mm)	80
Diameter air duct nom (mm)	80
Outer dimensions (l x w x h mm)	1280 x 140 x 140

Application Insights

Intended use	The exhaust of flue gas and the supply of combustion air
Location class	See intended use

Technical Specifications


Declaration of performance	001-MG-ALU DoP
Harmonized standard	EN 1856-1: 2009
System according to DoP	0.5
CE Marking	T250 P1 W V1 L10/11/13 150 O00
ζF Flue duct	0,65
ζA Air duct	7,31
Designed for appliance type	EN 1749: C3/C6
Wind direction property	A90
Ice formation Property	Ice-free
Rain water ingress property Flue duct	Unprotected (W)
Rain water ingress property Air duct	Protected
Counter flow property	FL2
Wind velocity pressure PL (Pa)	0
Resistant to penetration of objects (mm)	<16
Other specifications	-

Mounting and installation

Always install according to the national regulations. For safe installation, consult the installation and associated mounting instructions, see Burgerhout.com.

Graph

Pressure loss versus flow rate

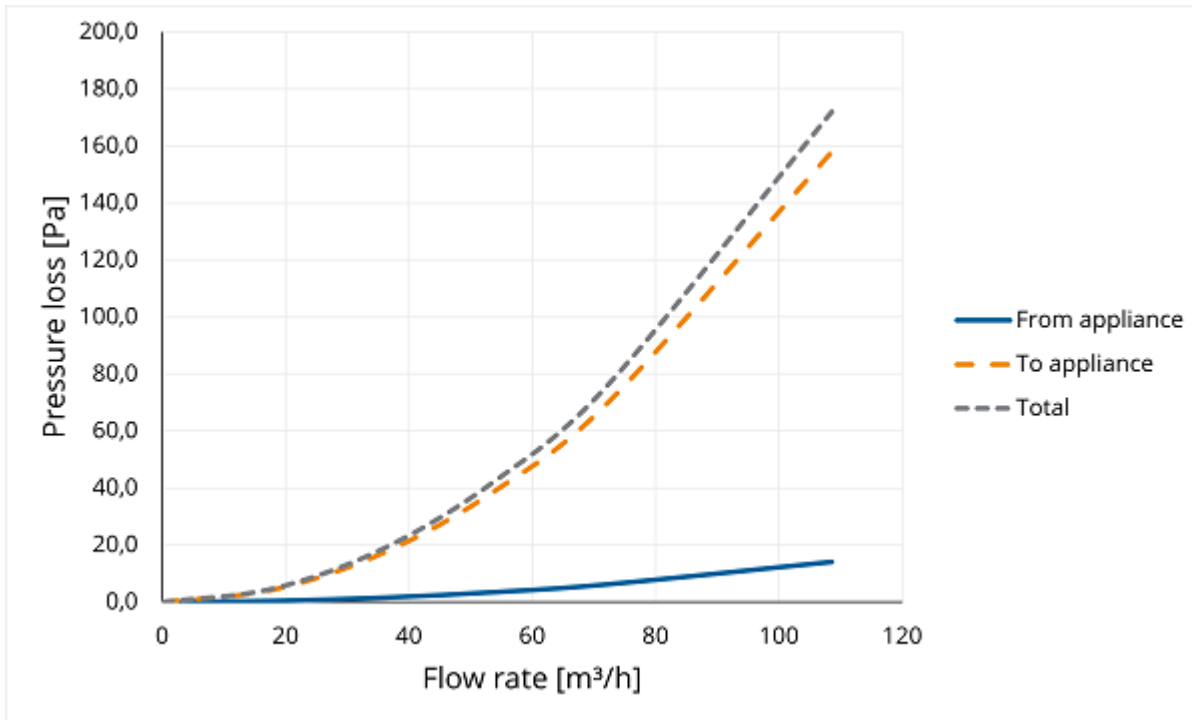

Table

Flow rate versus pressure loss

Flow rate			Static pressure loss		
[m/s]	[m³/h]	[l/s]	From appliance [Pa]	To appliance [Pa]	Total [Pa]
0	0	0	0,0	0,0	0,0
1	18	5	0,4	4,4	4,8
2	36	10	1,6	17,6	19,1
3	54	15	3,5	39,5	43,0
4	72	20	6,2	70,2	76,4
6	109	30	14,0	158,0	172,0