

## General information

### Hybalans+ Valve Connectionn 125 2x75



## Specifications

Article number	400470368
Product category	Air valve connection
Material	PP
Colour	RAL-5015
Weight (kg)	0,51

## Dimensions

Dimensions (l x w x h mm)	365 x 125,6 x 125,6
Connection diameter flexible (mm)	75

## Application Insights


Intended use	Air
Supply / Extract	Supply/Extract
Temperature range (°C)	-25 / +80

## Technical Specifications

Maximum air flow (m <sup>3</sup> /h)	80
ζ extract	0,00
ζ supply	2,90
Air Tightness Class	2
R-value (m <sup>2</sup> K/W)	0
Other specifications	-

## Valve connection 125 2x75 with Disc valve

Pressure loss

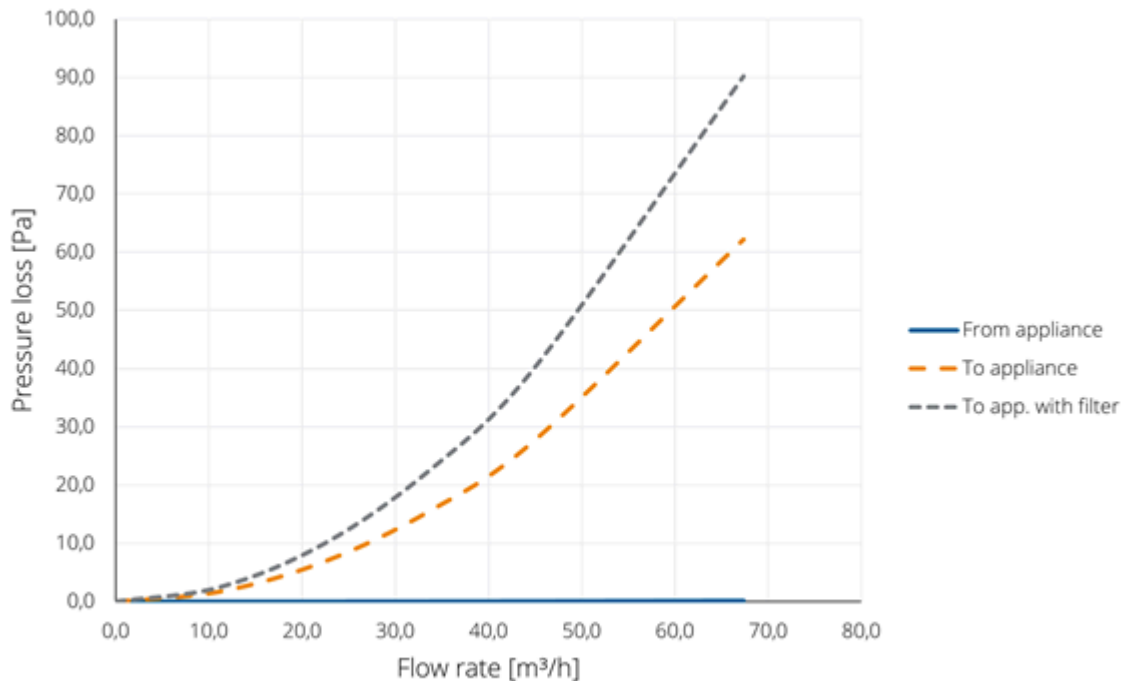

## Valve connection 125 2x75 with Disc valve

Flow velocity pressure table

Flow rate			Static pressure loss		
[m/s]	[m³/h]	[l/s]	From appliance [Pa]	To appliance [Pa]	To app. with filter [Pa]
0	0,0	0	0,0	0,0	0,0
1	11,2	3	0,0	1,7	2,5
2	22,4	6	0,0	6,9	10,0
3	33,7	9	0,0	15,5	22,6
4	44,9	12	0,1	27,6	40,1
6	67,3	19	0,1	62,2	90,2